


TRACK MOUNT FITTING INSTRUCTIONS

The Track Mount System was designed for fitting Roof Racks or Roof Bars to the Roof Tops of vehicles, which have no Rain Gutters or Specific Fixing Points for carrying loads on the roof of the vehicle. The TRACK MOUNT is a very safe and secure way of providing a very strong Base Mounting System, which also strengthens the rooftop. Suitable for mounting any type of TRACKLANDER, DREAMRIDER OR TRADES RACK ROOF RACKS & RED DIRT BAR Load Carrying Systems.



- Place the Track on the Rooftop in the required position.
- Shape the Track to the curve of Vehicle rooftop, by gently hitting the Track with a Rubber Hammer, as shown.

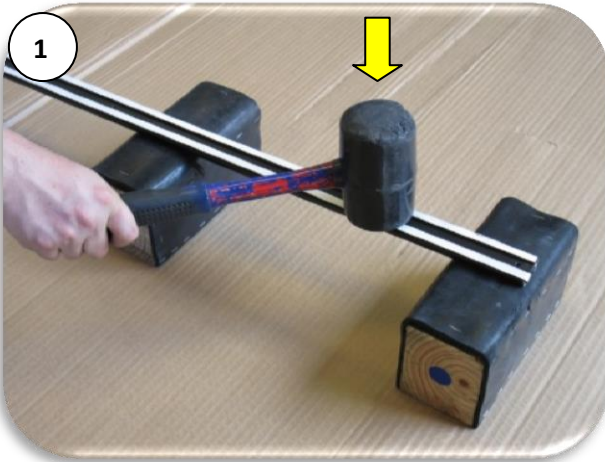

- Check that the Track matches the curve of the rooftop.
- Position Tracks on the Rooftop, wide as possible and parallel with each other if **Roof Bars** are to be fitted.
- When fitting **Leg Bars**, Tracks can be fitted parallel with Roof Channel Rubber.



- Position both Tracks the same distance from rear of Roof Top and close to the Channel Rubber on both sides of Roof Top.

4

- Mark holes with Marking Pen and drill with No.11 (Ø3/16) drill bit.
- Remove all drill filings from Roof Top, Windscreen, Wiper Blade Rubbers, and Door Sills etc. with Compressed Air or Vacuum Cleaner.

5

- Clean roof top in line with holes, with suitable Cleaning Fluid (Sika Cleaner), where Tracks will fit.
- **NOTE: All moisture, dirt, wax, polish must be removed from Roof Top where Tracks will be fitted, to allow Sealant/ Adhesive to bond properly.**

TRACK MOUNT FITTING INSTRUCTIONS



- Apply a continual 3mm high Bead of Sikaflex 252 Sealant/Adhesive (or similar) to Roof Top, in and in line with holes.



- Lower Tracks on to Roof Top and align with Holes in Roof.
- Fit all Rivets through Holes in Tracks and into Holes in Roof.



- Starting from the centre of each Track, Rivet either side of centre till you get to both ends of Track.
- Check that both Tracks are riveted securely to the Roof top.

- Slide the required amount of Brass Hex Track Nuts into the end of the Tracks.
- Measure Width of Tracks and set up Leg mounts or Leg Bars on Roof Bars or Roof Rack to suit.
- Secure Roof Bars or Roof Rack to Tracks with M6 But. Soc. Screws and Washers supplied.

NOTE: It is recommended to regularly check that all Fasteners are tight, especially after travelling over rough terrain.