

TLR SWJBS (190mm)



TLRSWJBL (240mm)

SPARE WHEEL "J" BOLT FIT INSTRUCTIONS

TLRSWJBS
(190mm long)



TLRSWJBL
(240mm long)




TLRSWJB is available in two sizes: TLRSWJBS – 190mm & TLRSWJBL – 240mm.

The **TRACKLANDER – SPARE WHEEL "J" BOLT (TLRSWJB)** is a handy, entry level accessory designed to secure a Spare Wheel (with Rim) to the Base of the Tracklander Roof Rack and carry it safely and securely over any terrain, without the use of Tie-Down Straps or Rope.


Simply remove Tapered Hex Nut, then hook "J" Bolt around a Roof Rack Crossmember. Pass Threaded Shank through the Mesh Base and up through the Stud hole in the Rim. Fit Hex Nut with the tapered side downwards into Stud Hole and tighten firmly with Spanner. **NOTE: Two "J" Bolts are recommended for 4WD Spare Tyres.**

The Spare Wheel "T" Bolt is made from 10mm dia. Zinc Plated Steel and comes in two lengths (TLRSWJBS – 190mm) and TLRSWJBL – 240mm) depending on the distance from the face side of the Tyre to the Rim.

SET UP OPTION - 1. (SINGLE "J" BOLT)

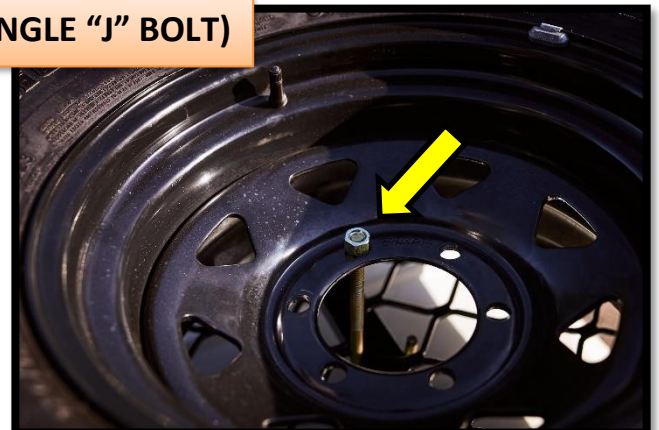

SET UP OPTION - 2. (DOUBLE "J" BOLT)

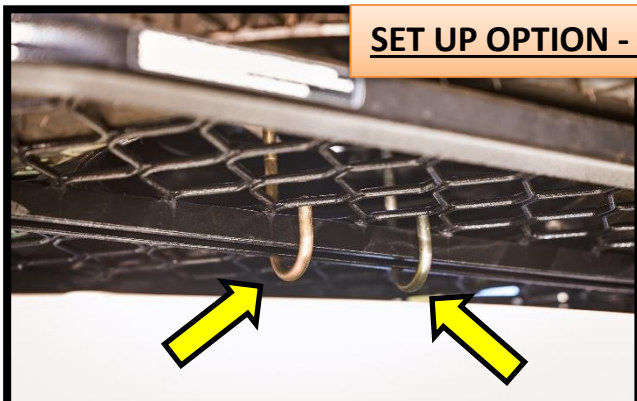

- Check Spare Wheel is always tight against Mesh Base, especially when travelling over rough terrain.