


TLRRTA

Fitting Instructions



Thank you for purchasing a TRACKLANDER 4WD ROOF RACK ACCESSORY. Before you start, take a moment to familiarise yourself with the Fitting Instructions and the components received. Refer to the next section for a list of all the components, quantities and tools required.

What's inside the box

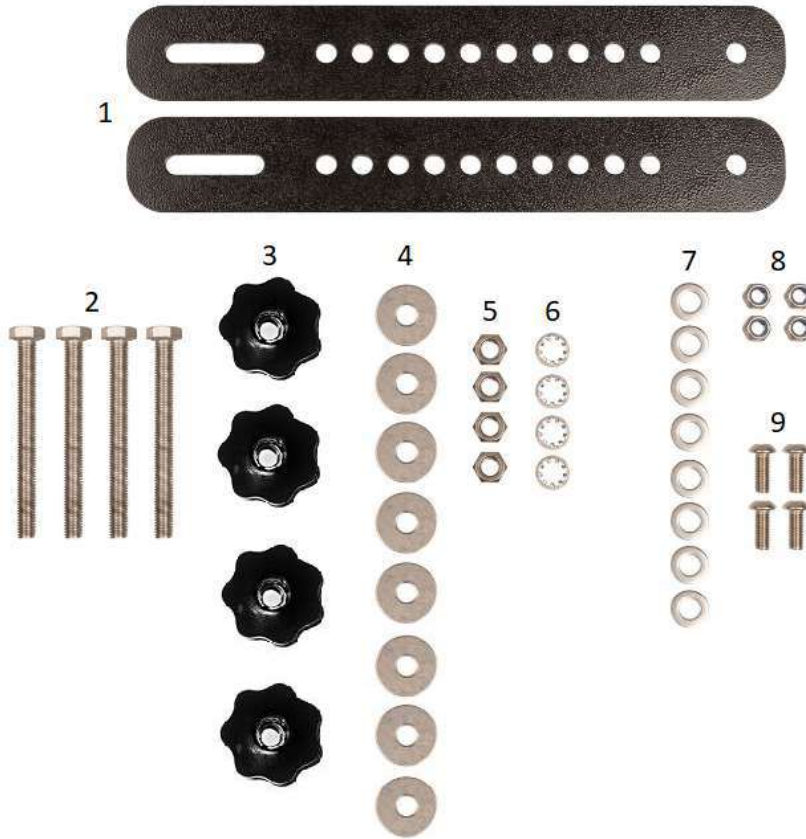

No	Description	Qty
1	TLRRTA	1 Pair
2	M10 x 130mm Hex Bolt (2 with holes for padlock)	4 Pcs
3	Securing Knob	4 Pcs
4	Flat Washer, $\frac{3}{8} \times 1$	8 Pcs
5	M10 Nut	4 Pcs
6	M10 Star Washer	4 Pcs
7	Flat Washer, $\frac{5}{16} \times \frac{3}{4}$	8 Pcs
8	M8 Nyloc Nut	4 Pcs
9	M8 x 20mm Button Cap Socket Head	4 Pcs

*TLRRTA works in tandem with TLRABB to function properly (Each sold separately)

1. Setting up of TLRRTA

- Align the hole on the Recovery Track Mount(TLRRTA) with the bottom slot of the Accessories Base Bracket(TLRABB).



- Secure Recovery Track Mount(TLRRTA) onto the Accessories Base Bracket(TLRABB) with the M8 Nyloc nuts and M8 Flat Washers provided.




- Secure the M10 x 130mm bolt firmly onto the bottom hole of the TLRRTA(Hole side)
 - Insert the M10 x 130mm bolt(With Padlock Hole) into the Slotted Hole of the Recovery Track Mount.
 - Position the Recovery Tracks onto the Recovery Track Mount to determine the setup height of the top M10 bolt.
 - Secure the top M10 bolt firmly with the fasteners provided ($\frac{3}{8}$ x 1 Flat Washer, M10 Star Washer & M10 nut)
 - The Recovery Track Assembly is now ready to be mounted onto the vehicle.
 - Mount the Recovery Track Assembly onto the Roof Rack as per fitting instructions stated in the TLRABB.

2. Fine tuning the assembly on the Roof Rack



- Check if the installed Recovery Track Assembly obstructs the opening of the vehicle's door.
- You may adjust the installed height of the Recovery Track Assembly by changing the hole location along the Recovery Track Mount.

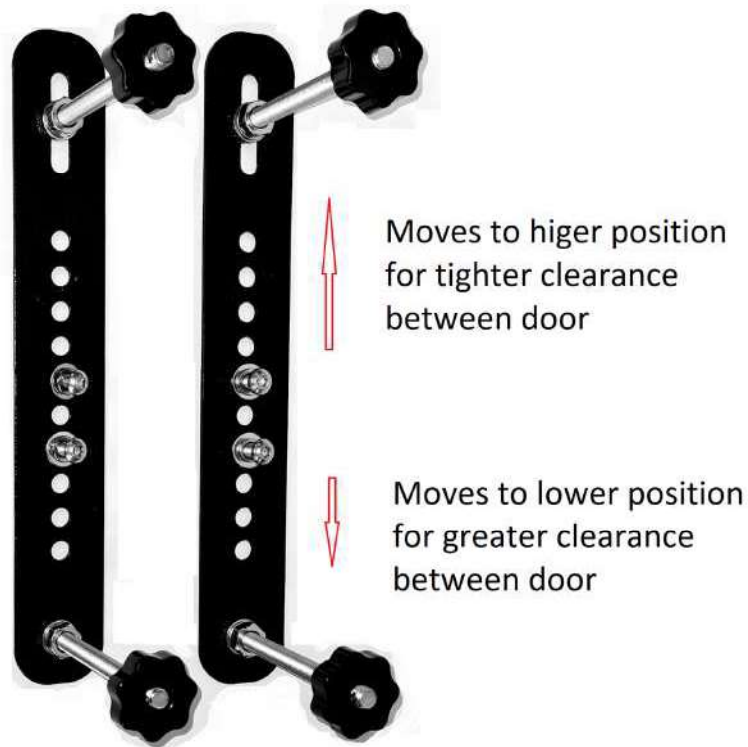

- For instance where lateral adjustment is needed, loosen the nuts at the back of the TLRABB and move the Recovery Track Mount accordingly to the required position.



SAFETY

- All accessories and brackets must be secured firmly onto the Roof Rack at all times.
- Frequently check the tightness of accessories and brackets on the Roof Rack especially after going through off-road terrain.
- TLRABB is designed to suit Tracklander X series accessories only. Do not attempt to attach products that are not intended for the design.

MAINTENANCE

- All bolted connections should be checked at regular intervals
- All bolted connections should be checked each time they are re-fitted.



IMPORTANT WARNING!

IT IS CRITICAL THAT ALL TRACKLANDER 4WD ROOF RACK PRODUCTS BE PROPERLY AND SECURELY ASSEMBLED AND ATTACHED TO YOUR VEHICLE. IMPROPER ATTACHMENT COULD RESULT IN AN VEHICLE ACCIDENT, AND COULD CAUSE SERIOUS BODILY INJURY OR DEATH. YOU ARE RESPONSIBLE FOR ASSEMBLING AND SECURING ALL TRACKLANDER 4WD ROOF RACK PRODUCTS TO YOUR VEHICLE, CHECKING THE ATTACHMENTS PRIOR TO USE, AND PERIODICALLY INSPECTING THE PRODUCTS FOR ADJUSTMENT, WEAR AND TEAR. THEREFORE, YOU MUST READ AND UNDERSTAND ALL OF THE INSTRUCTIONS AND PRECAUTIONS SUPPLIED WITH YOUR TRACKLANDER 4WD ROOF RACK AND ACCESSORIES PRIOR TO INSTALLATION OR USE. IF YOU DO NOT UNDERSTAND ALL OF THE INSTRUCTIONS AND WARNINGS, OR IF YOU HAVE NO MECHANICAL EXPERIENCE AND ARE NOT THOROUGHLY FAMILIAR WITH THE INSTALLATION PROCEDURES, YOU SHOULD HAVE THE PRODUCT INSTALLED BY A PROFESSIONAL INSTALLER OR OTHER QUALIFIED PERSON.

NOTE: TRACKLANDER 4WD ROOF RACKS will not be responsible for any damage caused by the failure to install the product according to these instructions. Please call us if you have any questions about the installation of this product.

TRACKLANDER 4WD ROOF RACKS

T : (08) 9451 0700 E :sales@tracklander.com.au W :tracklander.com.au

A:12 Railway Parade, Welshpool, WA 6106

OPEN 8.00AM - 5.00PM MON-FRI